

EF Smart Door Controller for Time Recorder

User Manual

Content

Chapter 1: Product introduction	
Main Function Features	1
Main Technical Parameter	2
Structure Description	3
EF fast index	4
Chapter 2: Installation	
Package list	7
Install EF	7
Operation	8
Chapter 3: System	
Clock	9
Card	10
System Setup	11
Door	13
Port	15
Language	15
Short Message	16
Name and Number	16
Appendix A: Port and Extended Signal	17
Appendix B: Authority Description	19
Appendix C: A.P.B. Description	20

Statement: The manufacturer reserves the right to change the technology and specification without notice in advance.

Warning: Do not repair EF privately. Our company disclaims any liability for the consequence from this.

Chapter 1: Production Introduction

EF-MM “Elfin” is integrated with time recorder, PWD door controller, single-door controller, reader with Chinese character display and double door controller. It is widely used in door controller, time recorder, real-time patrol and parking lot etc.

1. Main function features

1) All-purpose and wide application

- The product is integrated with PWD keyboard, reader in Chinese, single door controller, time recorder and double door controller. It is optional of button and no button, computer white and champagne color. The product is a new-generation production with high performance rate that can meet various customers’ demand.

2) Advanced technology, stable and reliable.

- All input and output pots can prevent shock from static and power. It has strong anti-interference ability and has power failure resisting design. The PCB board has moisture proof and corrosion protection and can adapt to different rough weather.

3) Dynamic definition, flexible application

- One build-in card reader (EM or Mifare), two sets of W26 interface, two sets of sensor input, two sets of button input, two sets of relay output, one set of bell port and one set of RS485 communication interface.
- Re-define the IO interface. For example, W26 port will be defined as W26 standard output or input, the relay can be defined as door controller, bell or alarm output, the sensor can be defined as fire alarm signal.
- Support hardware update on-line

4). Chinese-English menu, easy application

- Chinese-English Menu port with light, display the owner’s name and work number.
- Issue public short message and personal short message
- 16 alarm times are available. The alarm supports working day setting
- The clock modification parameter can ensure the correction of time for a long time.
- It can be networked (255 sets at most) and also be in off-line. It can complete the parameter setting by keyboard when is in off-line.

5) Professional door controller, powerful function


- Door control: 2 doors, standard wiegand 26 interface. It can connect with world famous reader such as HID and Motorola.
- Support 2500 card holders and store 25000 pieces of card reading information and alarm events.
- 32 time periods/64 time sets/16 application groups/8 types of holidays/validity period for card/card PIN (6 numbers)
- The product has two layers of A.P.B and mutual lock when the hardware is off-line. (Open only one door for each time)
- Only PIN, only card and card & PIN are available. It can also support duress PIN and super PIN.

- Soft control of any door, various alarm incidents functions: open time-out, close time-out, intrudes alarm, force alarm, burglar alarm and fire alarm etc.

2. Main Technical Parameter

Working voltage	AC/DC 8~25V
Power consumption	<1W
Data saving	>10 years (after power failure)
Total rec	25000 pieces (adjustable)
Card control	2500 pieces (adjustable)
LCD resolution	122×32 DOTS
Build-in word base	16×16 national class two character base.
Communication mode	One RS485
Wiegand 26 port	Two
Relay output	Two
State input	Four
Card reading type	EM compatible or Mifare
Induction distance	4—15cm
Networking capacity	255 sets
Working temperature	-20℃~70℃
Working humidity	20%~90%
Storage temperature	-25℃~85℃
Dimension	L120×W88×H18mm
Weight	160g

3. Structure Description

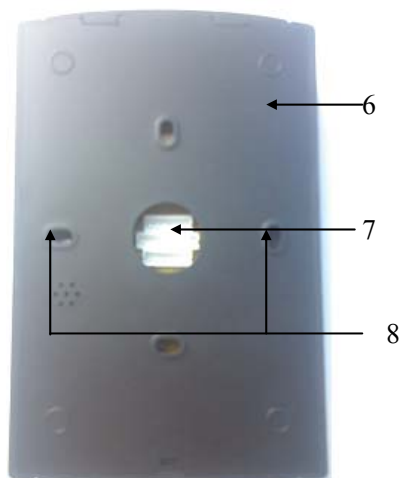


- 1、Liquid crystal display
- 2、indicator
- 3、keyboard
- 4、card induction area
- 5、bell button

- 6、rear patch
- 7、port
- 8、installation hole

4. EF Fast Index

1) Display icon index

Icon	Meaning
	Current option
↓	There is some information following, press < 9 > to review.
↑	There is some information above, press < 7 > to review.
<input type="checkbox"/>	There is no chosen item in the check box.
<input checked="" type="checkbox"/>	There is chosen item in the check box.
<input type="radio"/>	There is no chosen item in the radio button.
<input checked="" type="radio"/>	There is chosen item in the radio button.

2) Keyboard function index

Key	Function
< 0 > < 1 > < 2 > < 3 > < 4 > < 5 > < 6 > < 8 >	Number input
< 7 >	Number input Up
< 9 >	Number input Down
< * >	Cancel the operation Return to the high-authority menu Escape multiple choice or single choice and save the choice.
< # >	Confirm the operation Enter into the submenu Choose multiple choices or single choice.

3) Main Menu Index

Menu Main

- |—clock
 - | |—set time
 - | |—adj time
 - | | |— adj not
 - | | |— adj fast
 - | | |— adj slow
 - | |
 - | |—alm
 - | | |—alm 01->
 - | | | |—enable
 - | | | |—alarm
 - | | | |—delay
 - | | | |—weekset Sun Mon... Sat
 - | | | |— alm 16->
 - | | | | | (Ditto)
- |—Card
 - | |—add card
 - | |—update card
 - | |—Del card
- |—system
 - | |—Model ID
 - | |—light mode—NC, NO, Auto, time zone
 - | |—beep hint—keys, clock, hints,
 - | |—baud rate—2400bps, 4800bps, 9600bps, 19200bps
 - | |—Rec option— in rec, out rec, event rec, cycle, sameness, tot alarm, 5-digit
 - | |—menu PWD
 - | |—Sys info
 - | |—clear...
 - | |—update...
- |—door
 - | |—DR 1
 - | | |—authority
 - | | | |—timer—(0-31)
 - | | | |—time zone—(0-63)
 - | | | |—holiday
 - | | | |—APPset—(0-15)
 - | | |—control mode in and out, only in, any out , A.P.B.
 - | | |—entry mode— only card, only PIN, card & PIN
 - | | |—sensor type— sensor NO, sensor NC, fire NO, fire NC, null
 - | | |—button—NO, NC, null
 - | | |—open time
 - | | |—close time
 - | | |—first NO— ON, OFF
 - | | |—duress PIN
 - | | |—access PIN| |
 - | |—DR 2
 - | | | (Ditto)
 - | |— DR 1->2
 - | |— DR 2->1
- |—port
 - | |—relay 1— lock 1, lock 2, bell, alm , null
 - | |—relay 2— lock 1, lock 2, bell, alm , null,
 - | |—W26 port 1 in 1, out 1, in 2, out 2, W26 out , null,
 - | |—W26 port 2— in 1, out 1, in 2, out 2, W26 out , null
 - | |—Local reading— in 1, out 1, in 2, out 2, null
 - | |—Language— Chinese, English

Operation index for common keys

Go Menu

Press <*> and <#> (<*> first, then <#> soon after) at the initial state to enter into the menu state.

Menu Browse

The menu is in tree structure. In some submenu, <7> and <9> are used to choose the items up and down. The chosen item will be in white display (white letter on a black ground). Press <#> key to fix the item setting and press <*> to cancel the item setting and return to the high-authority menu. The system will automatically escape from the menu and restore the initial interface.

Multiple Choices and Single Choice

<7> key is to review upward, <9> key is to review downward; <#> key is to choose multiple choices or single choice; < * > key is to escape the multiple choice or single choice and save the choice result.

PIN Entry

—Applied to the Access PIN or Duress PIN

Press <#> at the initial state and the screen displays the prompt to enter the PWD. Enter the PWD (from <0> to <9>), and press <#> key to confirm.

PWD update

—Applied to the card & PIN

Read card and press the valid PWD, then press <*> and <#> quickly, read card again at the sight of the prompt. Enter the new PWD two times. The PIN update is successful. (Default PWD is: 888888)

Chapter 2: Installation

Proper installation can ensure the normal operation. This chapter makes a detailed description of installation for EF smart time recorder's hardware and software.


1. Package list

The packages include EF master engine, software CD, and 5 connection cables.

The manufacturer reserves the right to make modification to the above-mentioned items without notice in advance.

2. Installation

EF assembly figure:

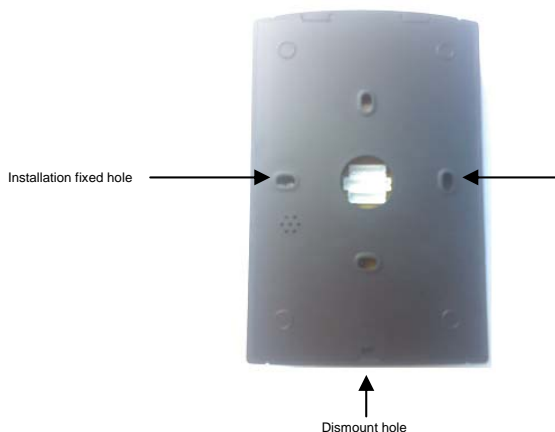


Note: After the equipment is on power, the system can be reset through the side cover dismount slotⓄ.

Networking with the control computer

EF provides RS485 networking mode. The communication distance is 1200m. It can be used for single/multiple machine communication and need RS232/RS485 converter to connect with computer.

It needs RS232/RS422 converter to connect RS485 port (JP1 or JP2) of EF time recorder. It is advisable to set the terminal resistance of 120Ω, for the long distance will results in great signal consumption.



Multiple networking

The multiple networking realizes by the connection with one in and the other out of JP1 and JP2 (JP1 and JP2 can be exchanged). Please refer to the figure. The terminal should connect with the terminal resistance of 120Ω. And its total distance is limited to 1200m.



4) Operation


Connect EF with power, the system will reset. The system will check after a “beep”. If the system is normal, the screen is in the initial interface.

Note: EF won't accept the card reading if it is menu setting or manage the computer's continual communication.

Chapter 3: System

This chapter mainly introduces how to set the system of EF time recer. There two ways are valaiable: keyboard and operating EF control software.


1.Clock

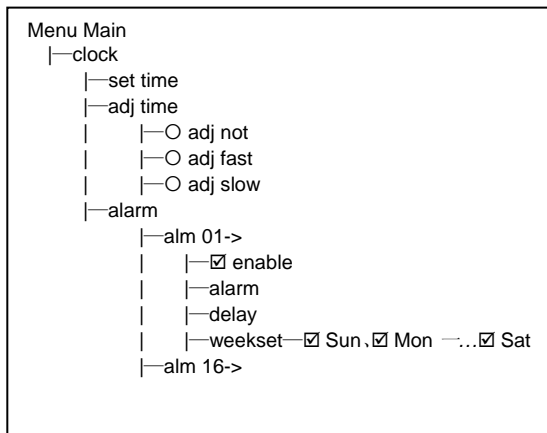

Set time

After a long time operation, the system’s time may be incorrect. So it is necessary to adjstut the time. (the time is in 24 Hours fomat.)

The set information display is shown as the right figure.




Adj time


This is used to adjust the time automatically to minimize the error after a long time operation.

○ *Adj not*—no system adjustment

○ *Adj fast*—the right figure displays after entering and then enter the adjustment value.



○ *Adjslow*—the right figure displays after entering and then enter the adjustmetn value.



Alarm

The user can set 16 alarm times at most (alarm 01—alarm 16). Each alarm time should cover following aspects:


Enable —hook-like mark means starting. If not, it means closing. Press < # > to cycle trigger.

Alarm time—input alarm time

Delay —the delay for alm

weekset—it can choose in which days it alarm on.

3. System

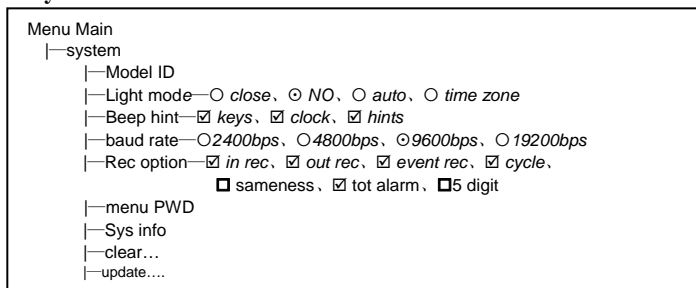

Model ID

In the RS485 network, each equipment has its own series number. We call this number Model ID. The EF support the Model ID from 0-254.

Light mode

NC—backlight—directly close

NO—backlight—directly open

Auto—Open light when button pressing and card reading. Automatically close the light when there is no such event.

time zone—Open the light in the set time zone.

Beep hint

keys—“beep” by pressing key.

alm —alm ing when alm triggers.

hints—sound when system events occur (such as: exterior reader reading card)

Baud rate

EF supports four kinds of baud rate such as 2400、4800、9600 and 19200. It can adapt to the RS485 networking communication.

Note: when the environmental interference and non-standard communication lines damage the communication, the baud rate should be reduced.

Rec option

In rec—recing in card reading

Out rec—recing out card reading

Event rec—including software open rec, PWD open rec, intrude rec, fire alm rec, button rec, duress rec, and clear rec etc.

Cycle—to cover the oldest recwhen the reccapacity is full.

No sameness--not recorde the card reading of the same card in the same site repeatedly in one minute.


Capacity pre-alert--it can trigger the alert after it being chosen. The port is shown as follow.

Set alm capacity 95%

5-digit card number--not choose default and read the 8-digit; choose to read the 5 digit.

Menu PWD

The PIN to entering into the main menu is made up of 6 digits at most, Follows the steps shown below.




Firstly, enter the former valid PWD, then enter the new PWD two times. The PWD update is successful. To lift PWD , just to enter no number to the new PWD . When entering a number, press <*> to clear it and press <#> to confirm.

Note: It is advisable to set PWD when it is used. (the default is empty)


Sys info

It is used to display rec of events, the number of registered card and occupied storage volume.



Clear

It can clear the three following datas: system setting, card register and event rec.



To clear according to the actual requirement. Press <#> to confirm the clear, and press <*> to cancel the clear.


Update

EF supports hardware update on-line. The steps are shown as follow:

1. EF communication port connects with computer by RS485/RS232 converter.
2. When EF is in the updata standby state, the operation is shown as follow: system ->update.

Install “JS Update tool for hardware” in the computer. Operate JS Updata.exe, communication port should choose correct interface, the baud rate is 19200, the update file should be the xxxxx.upd update file provided by the manufacturer. When the update starts, progress bar indicates the course of update. Please do not interrupt the course. After the update, terminal computer will reboot.


4. door

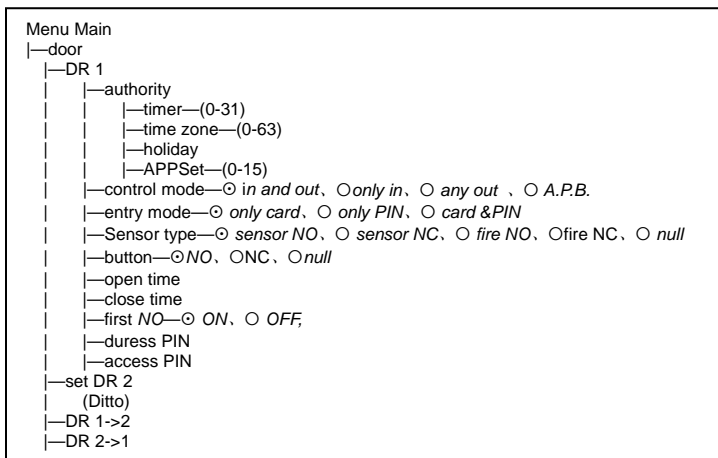


EF supports double-door controller

Authority


Timer—Support 32 time periods. See the right figure.



TimeSet—Support 64 time zones. See the right figure.



Holiday—Pre-set holiday authority type in one Year.



APPSet—support 16 groups. The group mentioned in the card is set here. See detailed authority structure in Appendix B about authority description.

Control Mode

In and out—In and out are strictly managed by the authority.

Only in—In is strictly managed by the authority. The out reader is invalid.

Any out—In is strictly managed by the authority and out just reading card.

A.P.B—Out by stamping card is valid only in the case of being in by stamping card.

Entry Mode

Card only—verify the card’s authority.

PIN only—Verify valid access PIN or duress PIN.

Card & PIN—Verify the card’s authority and enter valid PWD.

Sensor Type

Sensor NO—Signal is in short circuit to the ground, which indicates there is sensor signal. And the door opens.

Door NC—Signal is in open circuit to the ground, which indicates there is door switch. And the door opens.

Fire NO—Signal is in short circuit to the ground, which indicates there is fire signal. And it triggers the fire alm.

Fire NC—Signal is in open circuit to the ground, which indicates there is fire signal. And it triggers the fire alm.

Null—Signal is invalid.

Button

NO—Signal is in short circuit to the ground, which indicates the button is pressed.

NC—Signal is in open circuit to the ground, which indicates the button is pressed.

Null—Signal is invalid.

Open Time

It is the duration of unlocking when going in normally. If the open signal of sensor is founded during the time, the controller will close the lock at once. Otherwise, the controller will close the lock till the open time.

Close Time

It is the time from door open to close. In another word, the time from system detecting open signal to close signal is called close time. If the close time is over the set value, the system will alm to warn the user to close door.

Note: the above funtion is only available for door with sensor.

First NO

Within the set controltime of first group, if there is a normal and valid open, the door will keep open till the controltime is up. For example, the gate setting in the factory, it opens during working time and closes after work.

Duress PIN

When the seized by burglar, the user can press the PWD to open door. And the system will keep a duress event rec the monitor computer will display the rec. If the setting is empty, the PWD is invalid.

Access PIN

The PWD is used to open door directly. If the setting is empty, the PWD is invalid.

Set DR 2

The operation is the same as the above.

DR 1->2

Copy all setting of DR 1 to DR 2.

DR 2->1

Copy all setting of DR 2 to DR 1.

5. Port

Menu Main
—port setting
—relay 1— <input type="radio"/> lock 1, <input type="radio"/> lock 2, <input type="radio"/> bell, <input type="radio"/> alm, <input type="radio"/> null
—relay 2— <input type="radio"/> lock 1, <input type="radio"/> lock 2, <input type="radio"/> bell, <input type="radio"/> alm, <input type="radio"/> null
—W26 port 1— <input type="radio"/> in 1, <input type="radio"/> out 1, <input type="radio"/> in 2, <input type="radio"/> out 2, <input type="radio"/> W26 out, <input type="radio"/> null,
—W26 port 2— <input type="radio"/> in 1, <input type="radio"/> out 1, <input type="radio"/> in 2, <input type="radio"/> out 2, <input type="radio"/> W26 out, <input type="radio"/> null,
—Local reading— <input type="radio"/> in 1, <input type="radio"/> out 1, <input type="radio"/> in 2, <input type="radio"/> out 2, <input type="radio"/> null

The user can properly configure the interfaces (relay, W26 port and reader of the machine) provided by the system according to their own application demand.

Relay 1

Lock 1—Link with electric lock control of DR 1

Lock 2—Link with electric lock control of DR 2

bell—Link with alarm control of alarm

alm—Link with alarm event (such as illegal intrude etc)

Null—Signal is invalid.

Relay 2: ditto

W26 port 1

In 1—Port connects with standard W26 reader and controls in of DR 1.

Out 1—Port connects with standard W26 reader and controls out of DR 1.

In 2—Port connects with standard W26 reader and controls in of DR 2.

Out 2—Port connects with standard W26 reader and controls out of DR 2.

W26 out—Card reading employs standard W26 out. Therefore, EF can be used as reader.

Null—Signal is invalid.

W26 port 2: Ditto

Self reader

It is the same as W26 port 1, 2 except for the W26 output.

6. Language

Menu-Main
—Language— <input type="radio"/> Chinese, <input type="radio"/> English

Chinese and English are selectable.

7. Short message

The user can send some short word message (100 Chinese characters or 200 English letters) to the LCD screen of EF , such as: notice the company and advertisement etc. The system displays the message on the screen. If it isn't displayed in one line, it is be displayed in roll. The message has two kinds: public message and personal message. The public message will automatically display on the screen if the sending time is valid. While, the personal message is only displayed after the designated card is stamped.




Note: The short message is only sent by the control computer.

8 Name and work number

The name and work number of employee is sent to the time recer by the controlcomputer. The name is made up of 8 English letters or 4 Chinese characters at most, and the number is made up of 11 English letters and digits at most.

Note: For EF, the name and number can be only sent by the control computer.

Appendix A: Port and Extended Signal



Description for JP1 Port Signal

Terminal	Signal	Color	Remark
1	+V	red	Positive power (+DC12V)
2	GND	black	Power ground
3	LS1	blue	Relay output 1
4	LS1	purple	
5	RS485+	yellow	Positive RS485 communication
6	RS485-	green	Negative RS485 communication
7	BELL	gray	
8	BELL	gray	

Description for JP2 Port Signal

Terminal	Signal	Color	Remark
1	+V	red	Positive power (+DC12V)
2	GND	black	Power ground
3	DATA0	green	W26 data line 1
4	DATA1	white	W26 data line 1
5	OP1	yellow	Button 1
6	Mc1	orange	Sensor 1


Description for JP3 Port Signal

Terminal	Signal	Color	Remark
1	DATA0	green	W26 data line 2
2	DATA1	white	W26 data line 2
3	OP1	yellow	Button 2
4	MC2	orange	Sensor 2
5	LS2	blue	Relay output 2
6	LS2	purple	

Appendix B: authority description

Setting steps:

1. Set timer >> set Time zone >> set holiday >> set APPset 00-15.
2. Card >> add card or update card, set the validity period of the card and distribute corresponding APPset to the two doors.

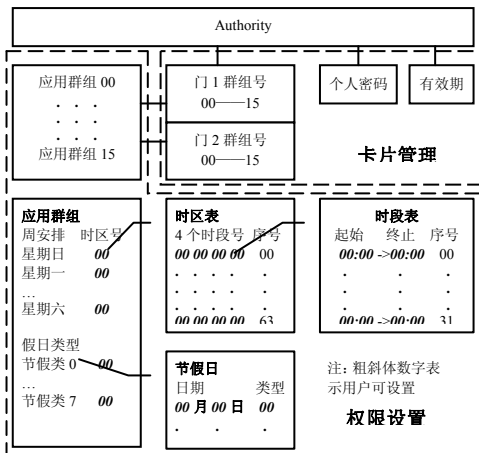

应用群组案例:

例 1

24 小时通行

应用群组	时区表	时段表
全部设为 00	00 00 00 00 00	00:00 -> 23:59 00

例 2

星期一 —— 星期五: 8:00——12:00 14:00——17:00 20:00——23:30

三段时间允许进入

星期六: 8:00——12:00 允许进入

星期日和节假日 (如: 10 月 1 日): 全天不允许进入

应用群组	时区表	时段表
星期日 00	00 00 00 00 00	00:00 -> 00:00 00
星期一 01	01 02 03 00 01	08:00 -> 12:00 01
星期二 01	01 00 00 00 02	14:00 -> 17:00 02
星期三 01		20:00 -> 23:30 03
星期四 01		
星期五 01	节假日	
星期六 02	日期 类型	
节假日 0 00	10 月 01 日 00	

Appendix C: A.P.B. Description

Requirement 1.

The one who enters by reading card is permitted be out by reading card.

Setting steps

Port ->W26 port 1 (set as in 1)

->W26 port 2 (set as out 1)

DR 1 -> control mode (set as A.P.B)

Requirement 2.

There is one entry and one exit in one parking lot. The card reading is necessary when entering and going out the lot. But the vehicle that isn't registered by card reading in the entry is forbidden to park in the lot.

Setting steps:

1. Port -> W26 port 1 (set as in 1)

-> W26 port 2 (set as in 2)

2. DR 1 -> control mode (set as A.P.B.)

3. Set DR 2-> control mode (set as A.P.B.)